



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) EP 0 815 821 A2

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:  
07.01.1998 Bulletin 1998/02

(51) Int Cl.<sup>6</sup>: A61F 13/15, A61F 13/42

(21) Application number: 97304545.3

(22) Date of filing: 26.06.1997

(84) Designated Contracting States:  
AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC  
NL PT SE

(72) Inventor: Matsushita, Michiyo  
Tyomishima-shi, Ehime ken (JP)

(30) Priority: 02.07.1996 JP 172325/96

(74) Representative: Parry, Christopher Stephen  
Saunders & Dolleymore,  
9 Rickmansworth Road  
Watford, Herts. WD1 7HE (GB)


(71) Applicant: UNI-CHARM CORPORATION  
Kawanoe-shi Ehime-ken (JP)

(54) Disposable training pants

(57) Disposable training pants include a liquid-permeable topsheet (11), a liquid-impermeable backsheet (12) and an absorbent core (13) disposed therebetween. The liquid-permeable topsheet (11) includes an upper layer sheet (17) and a lower layer sheet (18). The upper layer sheet (17) is formed with a wetness telling

area (19) and the lower layer sheet (18) intermittently bonded to the absorbent core (13) and containing fibrous material adapted to shrink by 10 % or more longitudinally of the pants as it is wetted and intermittently bonded to the absorbent core (13) and thereby intensify a feeling of wetness given to the infant.

FIG.4

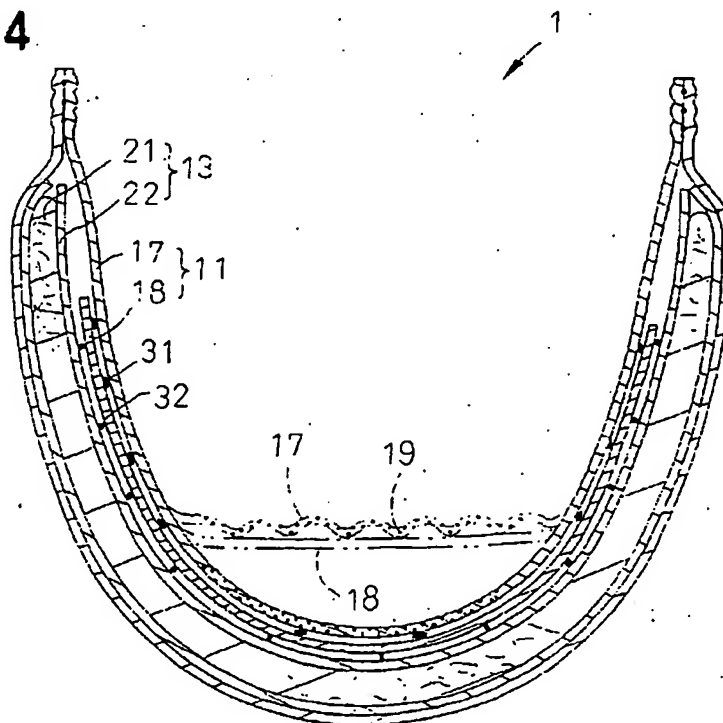

EP 0 815 821 A2

## Description

This invention relates generally to disposable training pants and more particularly to such pants that can be used when infants grow out of diapers and that include a wetness telling area.

Japanese Laid-Open Patent Application No. Hei4-5961 discloses a topsheet of disposable training pants partially formed with a wetness telling area having a hydrophilicity. In disposable training pants described in Japanese Laid-Open Patent Application No. Hei5-59601, the topsheet is provided at least over a middle area thereof with a moistness holding sheet partially bonded thereto and partially rising from the topsheet.

In disposable training pants or diapers comprising a liquid-permeable topsheet, a liquid-impermeable backsheet and a liquid-absorbent core extending between these two sheets, it is well known to keep the topsheet in close contact with the absorbent core by intermittently bonding these two components to each other so that a quantity of discharged body fluids may be transferred to the absorbent core as rapidly as possible. However, if the topsheet is bonded to the absorbent core in this manner in the disposable training pants or diaper as disclosed in the above-identified Applications, transfer of body fluids can be accelerated but only a small quantity of body fluids can stay in the wetness telling area or the moistness holding sheet and a feeling of wetness given to the infant by such area or sheet is correspondingly weakened.

In view of the problem as has been described above, it is a principal object of the invention to facilitate a quantity of body fluids to be held in a wetness telling area.

The object set forth above is achieved, according to the invention, by disposable training pants comprising a liquid-permeable topsheet, a liquid-impermeable backsheet and a liquid-absorbent core extending therebetween which form a front waist region, a rear waist region and a crotch region extending therebetween, said topsheet being intermittently bonded to said absorbent core and bonded to said backsheet at portions of said topsheet and said backsheet extending outward beyond a peripheral edge of said absorbent core, said disposable training pants being characterized in that:

said topsheet contains fibrous material causing at least a longitudinal dimension of said crotch region to shrink by 10 % or more as said topsheet is wetted so that said topsheet can shrink at least longitudinally of said crotch region and at least a shrinkable area of said topsheet can peel off upward from said absorbent core and wherein a predetermined area of said topsheet has a hydrophilicity higher than that in the area extending around said predetermined area and thereby defines a wetness telling area.

Fig. 1 is a perspective view showing training pants as an embodiment of the invention;

Fig. 2 is a plan view showing the training pants longitudinally unfolded, after transversely opposite side edges thereof have been peeled off from each other back and forth, as partially broken away;

Fig. 3 is a sectional view taken along line III-III in Fig. 2; and

Fig. 4 is a sectional end view taken along a longitudinal center line of the training pants as put on the infant.

Details of the training pants according to the invention will be more fully understood from the description given hereunder in reference with the accompanying drawings.

Disposable training pants 1 shown by Fig. 1 in a perspective view comprise a front waist region 2, a rear waist region 3 and a crotch region 4. The front and rear waist regions 2, 3 are bonded to each other along transversely opposite side edges 6, 7 thereof so as to form a waist-opening 8 and a pair of leg-openings 9, 10.

Fig. 2 is a sectional view showing the training pants longitudinally unfolded after the front and rear waist regions 2, 3 have been separated from each other back and forth along the side edges 6, 7 as partially broken away. The training pants 1 have a liquid-permeable topsheet 11, a liquid-impermeable backsheet 12 and a liquid-absorbent core 13 extending between these two sheets 11, 12. The topsheet 11 and the backsheet 12 are bonded to each other at portions thereof extending outward beyond a peripheral edge of the absorbent core 13 with a plurality of elastic members 14 serving to fit the training pants 1 around the infant's waist and a plurality of elastic members 16 serving to fit the training pants 1 around the infant's legs being bonded in elastically stretched conditions to inner surface(s) of the topsheet 11 and/or the backsheet 12.

The topsheet 11 comprises an upper layer sheet 17 and a lower layer sheet 18. The upper layer sheet 17 defines the entire inner surface of the training pants 1 and the lower layer sheet 18 is in the form of a rectangular sheet which occupies a transversely middle zone of the training pants 1 and extends longitudinally thereof. As will be described later in reference with Fig. 3, the lower layer sheet 18 is bonded to a bottom surface of the upper layer sheet 17. The upper layer sheet 17 is formed by liquid-permeable nonwoven fabric made of hydrophobic thermoplastic synthetic fiber and locally treated so as to become hydrophilic and thereby to define a wetness-telling area 19 (indicated by a dotted area in Fig. 2). The lower layer sheet 18 is made of liquid-permeable nonwoven fabric adapted to shrink longitudinally by 10 % or more when it is wetted. As a well known example of such nonwoven fabric, Japanese Patent Publication No. Hei6-102068 discloses nonwoven fabric of polyvinyl alcohol fiber obtained by spinning aqueous solution of polyvinyl alcohol having a polymerization degree of 1200 - 3000 and a saponification degree of 98.0 or higher.

As the backsheet 12, film of thermoplastic synthetic resin is used.

The absorbent core 13 comprises a liquid-absorbent panel 21 and upper and lower liquid-absorbent sheets 22 such as tissue paper having a high absorptivity as well as a high diffusibility and covering the absorbent panel 21. The absorbent panel 21 contains fluff pulp fiber of 50 % by weight or higher, water-absorptive polymer particles of less than 50 % by weight and thermoplastic synthetic fiber of less than 20 % by weight.

Fig. 3 is a sectional view taken along line III-III (center line) in Fig. 2. Regarding the topsheet 11, the upper layer sheet 17 is bonded to the lower layer sheet 18 by means of intermittently applied first hot melt adhesive 31, on one hand, and the lower layer sheet 18 is bonded to the upper liquid-absorbent sheet 22 by means of intermittently applied second hot melt adhesive 32, on the other hand. The first adhesive 31 should be principally urine-insoluble but the second adhesive 32 may be either urine-soluble or urine-insoluble as circumstances require.

When urine is discharged in the training pants 1 constructed as has been described above, a quantity of discharged urine rapidly moves into the absorbent core 13 because the topsheet 11 remains in close contact with the absorbent core 13 for a while. As a time elapses, the lower layer sheet 18 of the topsheet 11 begins to shrink and the second adhesive 32 begins to be solved in urine so far as the second adhesive 32 is of urine-soluble type. Consequently, an adhesive force tending to maintain the lower layer sheet 18 and the liquid-absorbent sheet 22 bonded to each other begins to weaken. As the shrinkage progresses and adhesive force further weakens, the lower layer sheet 18 is peeled off from the upper liquid-absorbent sheet 22 and becomes free to shrink. When the second adhesive 32 is of urine-insoluble type, the quantity of urine permeating the upper liquid-absorbent sheet 22 also in the proximity of interfaces between the second adhesive 32 and the upper liquid-absorbent sheet 22 eventually permeates the interfaces until the second adhesive 32 comes off from the upper liquid-absorbent sheet 22. As a result, the lower layer sheet 18 is separated from the upper liquid-absorbent sheet 22 and becomes free to shrink.

Fig. 4 is a sectional view taken along the longitudinal center line of the training pants 1 as worn showing a behavior of the topsheet 11 before and after discharge of urine. With the training pants 1 curved as shown on the infant body, the quantity of urine discharged makes the lower layer sheet 18 of the topsheet 11 free to shrink and consequently peels the lower layer sheet 18 upward off from the absorbent core 13 as indicated by imaginary lines, allowing the lower sheet 18 to come in close contact with the infant's skin. Since the upper layer sheet 17 is integral with the lower layer sheet 18, the upper layer sheet 17 forms gathers and moves upward together with the lower layer sheet 18 as the lower sheet 18 shrinks. A portion of the upper layer sheet 17 adapted

to move upward is formed with the wetness telling area 19. Accordingly, the wetness-telling area 19 is kept in contact with the infant's skin and is able to fulfill its desired function even if the training pants 1 somewhat have slipped down after the training pants 1 was worn. If discharge of urine is repeated after the topsheet 11 has been peeled off from the absorbent core 13, this quantity of urine discharged again will stay in and around the wetness telling area 19 for a long period without being readily absorbed by the absorbent core 13, giving the infant an intense feeling of wetness.

With the training pants 1 according to the invention, the lower layer sheet 18 in the embodiment shown may be replaced by a plurality of threads adapted to shrink when they are wetted. As a well known example of such threads, Japanese Patent Publication No. Hei6-102068 discloses threads made from polyvinyl alcohol. Such threads may be provided so as to extend not only longitudinally but also transversely of the pants 1 to accelerate shrinkage as well as peeling off of the upper layer sheet 17 with respect to the absorbent core 13 occurring when the upper layer sheet 17 is wetted. To form the upper layer sheet 17 with the wetness telling area 19, the individual fibers of the wetness telling area 19 may be applied with suitable agent or water-absorbent fibers may be mixed into the individual fibers of the wetness telling area 19 to make the wetness telling area 19 substantially hydrophilic. Preferably, the lower layer sheet 18 is intermittently bonded to the upper liquid-absorbent sheet 22 in order that the lower layer sheet 18 can be free to shrink and an area over which these two sheets 18, 22 are bonded to each other is smaller in a region 37 (Fig. 2) extending outside the transversely opposite side edges than in a region 36 (Fig. 2) extending outside the longitudinally opposite ends of the wetness telling area 19. Outside said transversely opposite side edges of the wetness telling area 19, the lower layer sheet 18 and the upper liquid-absorbent sheet 22 may be substantially or completely free from being bonded to each other. Preferably, the lower layer sheet 18 is shrinkable by 10 % or higher approximately 10 seconds after the lower layer sheet 18 begins to be wetted in order that the infant can perceive a wetness as soon as possible after discharge of urine has occurred and thereby an effect of training for the infant can be improved. A peel strength of the second adhesive 32 used to bond such lower layer sheet 18 to the upper liquid-absorbent sheet 22 is preferably selected in a range from 100 g/25 mm of width under its dry condition to 5 g/25 mm of width under its wetted condition. The peel strength under the wetted condition is measured after the topsheet 11 has been impregnated with 50 % of a saturated moisture content and left as it is. As the second adhesives 32, it is preferred to employ rubber hot melt adhesive containing a base material such as SBS, SIS, SEBS or SEPS and having a solidifying time less than 2 seconds. The upper and lower layers 17, 18 of the topsheet 11 may be bonded to each other by heat-sealing technique in-

stead of using the first adhesive 31.

The invention allows the infant to perceive a wetness even if the training pants have slipped downward after it was worn, since the topsheet of the inventive disposable training pants shrinks longitudinally of the pants practically as soon as it is wetted with urine, thereupon peels off from the absorbent core and moves upward in close contact with the infant's skin. Once having peeled off from the absorbent core, the topsheet remains impregnated with the quantity of discharged urine for a long period and thereby intensifies a feeling of wetness given to the infant by the wetness telling area.

pulp of 50 ~ 100 % by weight and a liquid-absorbent sheet covering said absorbent panel and wherein said topsheet is bonded to said liquid-absorbent sheet by means of adhesive agent.

6. Disposable training pants according to any one of Claims 1 through 4, wherein said topsheet is bonded to said absorbent core by means of water-soluble adhesive agent and said adhesive agent is solved in urine as said topsheet is wetted whereupon said topsheet can peel off from said absorbent core.

#### Claims

1. Disposable training pants comprising a liquid-permeable topsheet, a liquid-impermeable backsheet and a liquid-absorbent core extending therebetween which form a front waist region, a rear waist region and a crotch region extending therebetween said topsheet being intermittently bonded to said absorbent core and bonded to said backsheet at portions of said topsheet and said backsheet extending outward beyond a peripheral edge of said absorbent core, said disposable training pants being in characterized in that:  
 said topsheet contains fibrous material causing at least a longitudinal dimension of said crotch region to shrink by 10 % or more as said topsheet is wetted so that said topsheet can shrink at least longitudinally of said crotch region and at least a shrinkable area of said topsheet can peel off upward from said absorbent core and wherein a predetermined area of said topsheet has a hydrophilicity higher than that in the area extending around said predetermined area and thereby defines a wetness telling area.
2. Disposable training pants according to Claim 1, wherein said topsheet contains also fibrous material adapted to shrink transversely of said crotch region as said topsheet is wetted.
3. Disposable training pants according to Claim 1 or 2, wherein said fibrous material comprises nonwoven fabric forming at least a part of lower side of said topsheet.
4. Disposable training pants according to any one of Claims 1 through 3, wherein said fibrous material comprises threads extending at least longitudinally of said crotch region and bonded to the lower side of said topsheet.
5. Disposable training pants according to any one of Claims 1 through 4, wherein said absorbent core comprises a liquid-absorbent panel containing fluffy

FIG.1

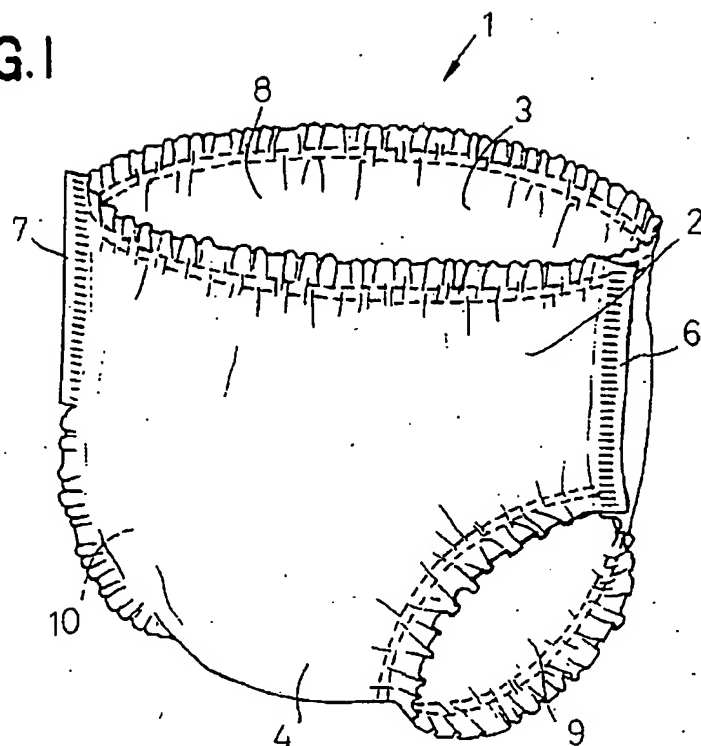


FIG.4



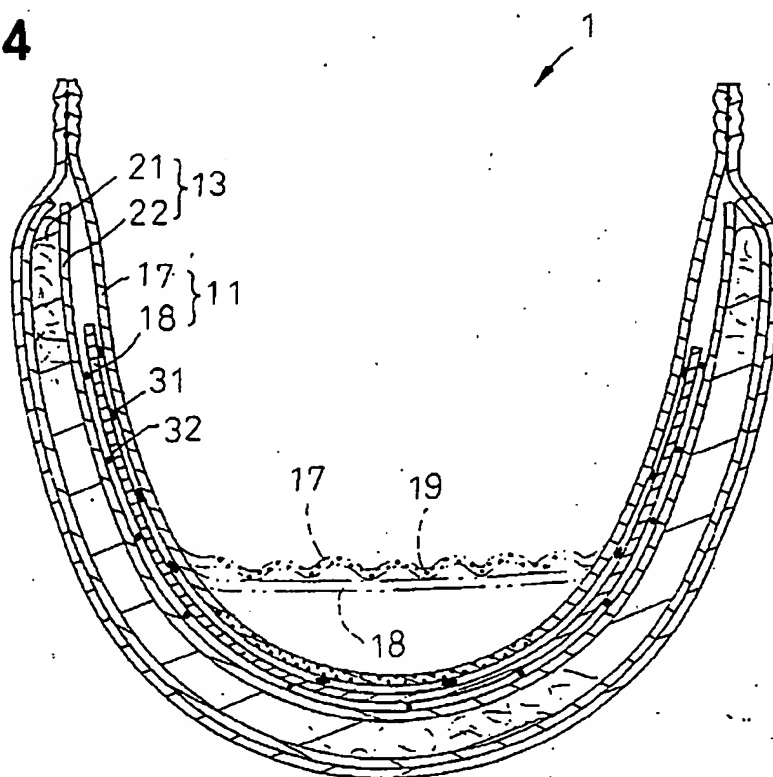




FIG.3

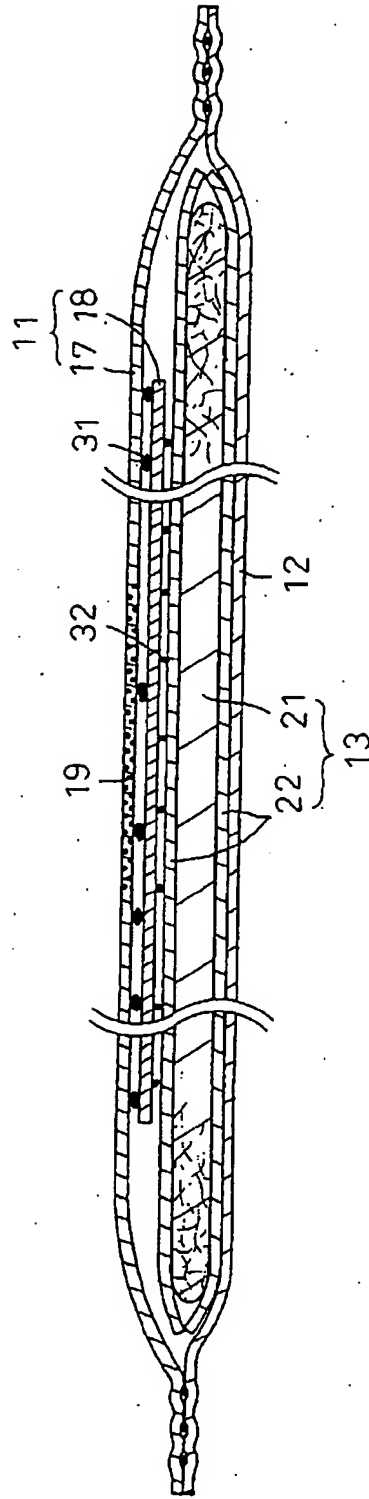



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 0 815 821 A3**

(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:  
11.08.1999 Bulletin 1999/32

(51) Int Cl.<sup>6</sup>: **A61F 13/15, A61F 13/42**

(43) Date of publication A2:  
07.01.1998 Bulletin 1998/02

(21) Application number: **97304545.3**

(22) Date of filing: **26.06.1997**

(84) Designated Contracting States:  
**AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC  
NL PT SE**

(72) Inventor: **Matsushita, Michiyo**  
**Tyomishima-shi, Ehime ken (JP)**

(30) Priority: **02.07.1996 JP 17232596**

(74) Representative: **Parry, Christopher Stephen**  
**Saunders & Dolleymore,**  
**9 Rickmansworth Road**  
**Watford, Herts. WD1 7HE (GB)**


(71) Applicant: **UNI-CHARM CORPORATION**  
**Kawanoe-shi Ehime-ken (JP)**

(54) **Disposable training pants**

(57) Disposable training pants include a liquid-permeable topsheet (11), a liquid-impermeable backsheet (12) and an absorbent core (13) disposed therebetween. The liquid-permeable topsheet (11) includes an upper layer sheet (17) and a lower layer sheet (18). The upper layer sheet (17) is formed with a wetness telling

area (19) and the lower layer sheet (18) intermittently bonded to the absorbent core (13) and containing fibrous material adapted to shrink by 10 % or more longitudinally of the pants as it is wetted and intermittently bonded to the absorbent core (13) and thereby intensify a feeling of wetness given to the infant.

**FIG.4**

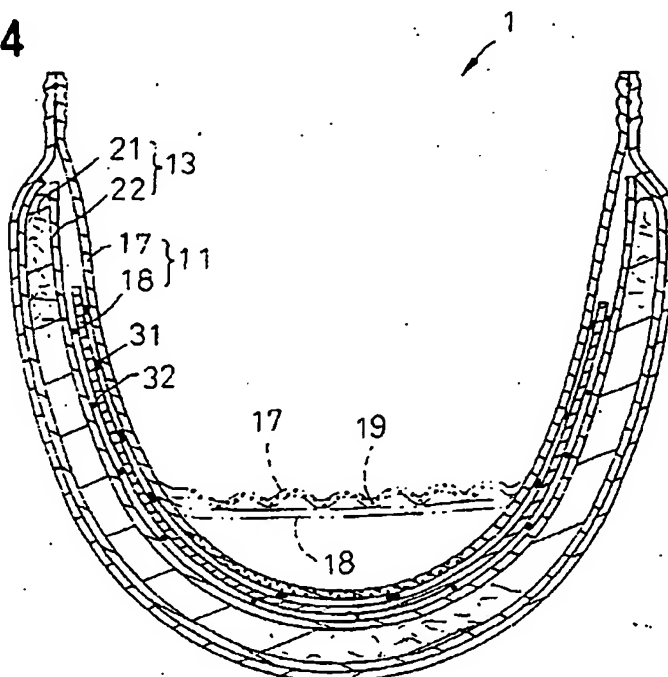

**EP 0 815 821 A3**





European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 97 30 4545

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
P, A	WO 96 19168 A (KIMBERLY CLARK CO) 27 June 1996 * page 28, line 34 - page 32, line 18; claims 19-31 *	1	A61F13/15 A61F13/42
A	DE 36 08 114 A (PUTTFARCKEN ULF) 17 September 1987 * the whole document *	1	
A	US 4 357 938 A (ITO OSAMU ET AL) 9 November 1982 * claims *	1	
A	EP 0 529 641 A (UNI CHARM CORP) 3 March 1993 * claims *	1	
A	EP 0 386 816 A (PROCTER & GAMBLE) 12 September 1990 * claim 1 *	1	
A	US 5 425 726 A (ABE KEIJI ET AL) 20 June 1995 * claims *	1	TECHNICAL FIELDS SEARCHED (Int.Cl.6) A61F
A	US 4 834 733 A (HUNTOON ANDREW E ET AL) 30 May 1989 * claims *	1	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 23 June 1999	Examiner Douskas, K
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 (03/02) (P/C/G)

ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.

EP 97 30 4545

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

23-06-1999

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9619168 A	27-06-1996	US 5649914 A	22-07-1997
		AU 689368 B	26-03-1998
		AU 4598496 A	10-07-1996
		BR 9510525 A	14-07-1998
		CA 2208891 A	27-06-1996
		EP 0799004 A	08-10-1997
		JP 10511278 T	04-11-1998
		US 5797892 A	25-08-1998
		US 5702376 A	30-12-1997
		ZA 9510846 A	25-06-1996
DE 3608114 A	17-09-1987	NONE	
US 4357938 A	- 09-11-1982	JP 1356612 C	13-01-1987
		JP 57035002 A	25-02-1982
		JP 61020642 B	23-05-1986
		BE 889614 A	03-11-1981
		DE 3130241 A	16-06-1982
		FR 2488107 A	12-02-1982
		GB 2082073 A,B	03-03-1982
		HK 1287 A	09-01-1987
EP 0529641 A	03-03-1993	JP 2849246 B	20-01-1999
		JP 5059601 A	09-03-1993
		AU 648430 B	21-04-1994
		AU 2125892 A	04-03-1993
		CA 2076587 A,C	01-03-1993
		DE 59206693 D	08-08-1996
		GB 2259018 A,B	03-03-1993
		KR 116497 Y	20-04-1998
		US 5342343 A	30-08-1994
EP 0386816 A	12-09-1990	US 5037416 A	06-08-1991
		AT 104134 T	15-04-1994
		AU 645006 B	06-01-1994
		AU 5079990 A	20-09-1990
		CA 1335229 A	18-04-1995
		CN 1045347 A,B	19-09-1990
		DE 69008008 D	19-05-1994
		DE 69008008 T	29-09-1994
		DK 386816 T	16-05-1994
		EG 19139 A	29-09-1994
		ES 2052156 T	01-07-1994
		FI 96093 B	31-01-1996
		HK 94896 A	07-06-1996
		IE 63626 B	17-05-1995

FPO FORM 10/98

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 97 30 4545

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

23-06-1999.

Patent document cited in search report	Publication date	Patent family member(s)	* Publication date
EP 0386816 A		JP 3202056 A	03-09-1991
		MX 166876 B	10-02-1993
		PT 93372 A	07-11-1990
		TR 24073 A	01-03-1991
US 5425726 A	20-06-1995	CA 2009452 A	08-08-1990
		DE 69005659 D	17-02-1994
		DE 69005659 T	05-05-1994
		EP 0382022 A	16-08-1990
		ES 2047165 T	16-02-1994
		HK 125295 A	11-08-1995
		JP 2297364 A	07-12-1990
US 4834733 A	30-05-1989	NONE	

EPO FORM PC459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82